

UV Angel Touchscreen

PRODUCT SKU: UVA-A00-001




SecCom Healthcare


SECURE COMMUNICATION, INC.

975 Park Avenue, 5th Floor • New York, NY 10028



212-533-6500 • www.SecComHealthcare.com

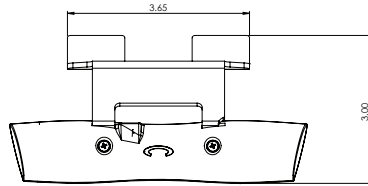


TOP VIEW




REAR VIEW

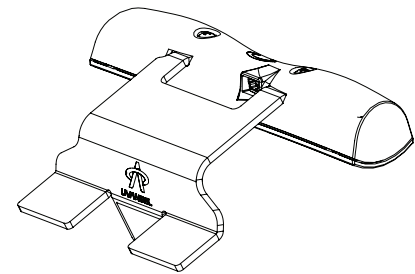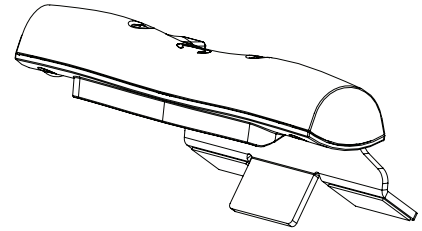

PERSPECTIVE VIEWS



BOTTOM VIEW



SIDE VIEW

MECHANICAL

Dimensions (LxWxH) 76.2 mm (3") X 152.4 mm (6") X 91.4 mm (3.6")
Weight 85 g (3 oz)

ELECTRICAL

Input Voltage 5V @ 500mA Max
Operating Power ~465mA @ 5V or 2.33W
Standby Power No Task Lights ~40mA @ 5V or 0.2W
Standby Power With Task Lights ~75mA @ 5V or .38W
Communication Port USB Mini-B

ENVIRONMENTAL

Operating Temperature 0°C to 50°C (32°F to 122°F)
Storage Temperature 0°C to 60°C (32°F to 140°F)
Operating Humidity 20% to 90% (non-condensing and no freezing)
Storage Humidity Below 85% (non-condensing and no freezing)
Bulb Energy ~6700 µW/cm² (Bulb Surface)

PERFORMANCE

Light Pattern at Desktop (W x D) TBD
Warranty One year limited warranty
Extended Warranty Available by request only

